

Main business:

—
Craft Plywood / Furniture Grade Plywood /
Commercial Plywood / Melamine Plywood / Birch Plywood For Flight
Case /CDX Plywood / Lightweight Plywood /
Fiame Retardant Plywood etc.



Foresmate

Shanghai Techlon Co.,Ltd

Focus on plywood since 1970



Shanghai Techlon Co.,Ltd

Add: No 666 Shisi Pingjiang Road, Fuqiao Town, Taicang City, Jiangsu, China

Tel: +86-15905513582

Web: foresmate.com | foresply.com

E-mail: jalon@foresmate.com

1970^{YEAR}

Incorporation of the Company

Shanghai Techlon Co.,Ltd was established in 1970 and has been engaged in the plywood board industry for 30 years. We always focuses on commercial plywood furniture boards, laminated boards, hardware accessories and whole-house customization services, we also an comprehensive group company with R&D, design, production, sales and integrating whole services.

18000000+^{CBM}

Multilayer board production base

Our company owned 35 subsidiaries& 1,300 warehouse distribution service outlets. We have 2 commercial plywood production bases with an annual production capacity of 100,000cbm, and 3 wood veneer production bases with 600,000cbm annual production capacity ,also owned hpl and melamine paper production lines.

1300+

Warehouse

Agents and distributors

"Environment protecting, customer first, open&sharing, create a better future together" is the corporate value we always adhere to. We will keep effort to be a well reputation & environmentally friendly building materials company serving the world.

COMPANY PROFILE

CONTENS

目 录



Craft Plywood




Furniture Grade Plywood



Commercial Plywood



Melamine Plywood

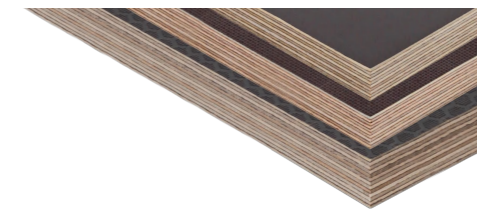

Birch Plywood For Flight Case



CDX Plywood



Lightweight Plywood



Flame retardant Plywood

Craft Plywood For Laser

Description

Special thickness tolerance, different thickness can be selected according to customer requirements

100% thin sheet with few or no defects

Carefully selected solid Interior surface and Interior surface

Cutting level can not afford burrs

Glue will not burn under the influence of the laser beam

Nail holding force is 10 times of cedarwood,

Fast and neat laser cutting

Certificate

CE CARB FSC IAF ISO EPA

Specification

Thickness(mm): 1.5 | 2 | 2.9 | 3 | 3.6 | 3.7 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 12 | 15 | 18 | 25 | 30

Size(mm): 915x915 | 1220x2440 | 1220x2750 | 1250x1250 | 1525x1525
| 1500x3000 Cut to the required

Surface Grade: B | BB | CP | C | WG

Core: Birch | Basswood | Beech | Eucalyptus | Poplar | Combi

Surface: Birch | Basswood | Ev | Beech | Pine | Okoume

Surface treatment: Twin polishing

Formaldehyde emission: 0.1-0.3mg/hxm²/P2/E0/E1
(normal value): 3.5mg/hxm²

Application



Toy manufacturing



Furniture production



Tables and chairs manufacturing



Furniture Grade Plywood

Description

- Surface flawless,core is the best material
- Strong grip, reusable
- Durability
- Lightweight
- Dimensional stability
- Easy to use and handle
- Formaldehyde emission level meets the requirements CE,CARB,FSC,IAF,ISO,EPA

Certificate

CE CARB FSC IAF ISO EPA



Specification

- Thickness(mm): 5 | 6 | 7 | 8 | 9 | 10 | 12 | 15 | 16 | 18 | 21 | 24 | 27 | 30 | 35 | 40
- Size(mm): 1220x2440 | 1220x2750 | 1250x1250 | 1525x1525 | 1500x3000 Cut to the required
- Surface Grade: B | BB | CP | C
- Core: Birch | Beech | Eucalyptus | Poplar | Combi
- Surface: Pine | Okoume | Birch | Basswood | Ev | Support UV coating film
- Formaldehyde emission: 0.1-0.3mg/hxm² (normal value):3.5mg/hxm²

Application



Furniture production



Decoration



Toy production

Commercial Plywood

Description

- Various environment protection grade include ENF etc
- High quality wood veneer, wear-resistant decorative surface
- Neat hierarchy without splicing texture,
- No cracking and deformation
- Smooth surface
- Variety of surface wood veneer can be selected
- Double-sided sticking veneer without digging.

Certificate

CE CARB FSC IAF ISO EPA



Specification

- Thickness(mm): 2 | 3 | 5 | 6 | 9 | 12 | 15 | 18 | 21 | 24 | 27 | 30 | 35 | 40
- Size(mm): 1220x2440 | 1220x2750 | 1250x1250 | 1525x1525 | 1500x3000
Cut to the required
- Surface Grade: B | BB | C | CC | D
- Glue: MR | WBP
- Core: Birch | Eucalyptus | Poplar | Combi
- Surface: Okoume | Eucalyptus | Pine | Bintangor | Keruing | Birch | Poplar | Tropical hardwood etc

Formaldehyde emission:0.1-0.3mg/hxm²
(normal value):3.5mg/hxm²


Application



Furniture production



Decoration




Building



Decorative plates



Commercial plywood is generally moisture-resistant plywood, also known as MR grade plywood. It is durable, flexible due to good tensile strength. Though Commercial plywoods are made from different veneer varieties, the basic properties of commercial plywood continue to be the same. The inside material is the same. Basic applications of commercial plywood include hanging lights, furniture, and bookshelves, kitchen tops, file cabinets, tables, doors, chairs, etc.

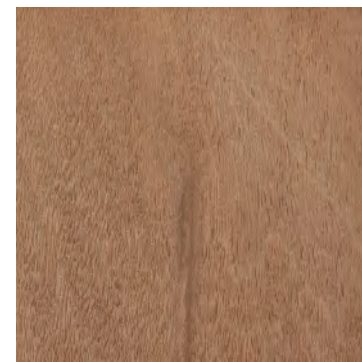


Okoume



Pine



Bingtangor

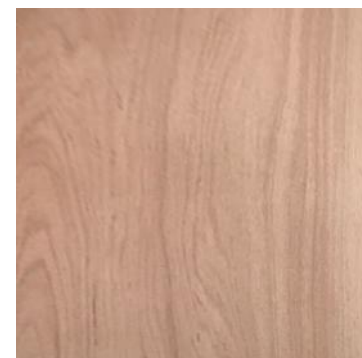


Pencil cedar



Poplar



keruing

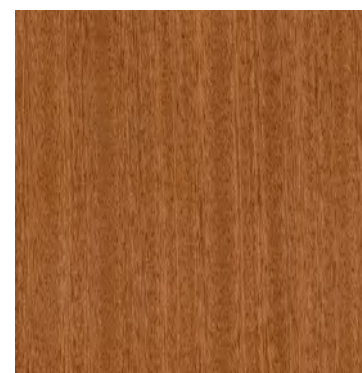

Sapele



Birch



EV

Melamine Plywood



Description

- Smooth surface for easy cleaning
- Wear resistant surface, no cracks
- Wide selection of colors, designs and surface textures
- Excellent strength and durability
- Does not contain nor release harmful substances
- It is suitable for both indoor and outdoor use
- Double - sided sticking veneer without digging.

Certificate

CE CARB FSC IAF ISO EPA

Specification

- Thickness(mm): 2 | 3 | 5 | 6 | 9 | 12 | 15 | 18 | 21 | 24 | 27 | 30 | 35 | 40
- Size(mm): 1220x2440 | 1220x2750 | 1250x1250 | 1525x1525 | 1500x3000
Cut to the required
- Surface Grade: B | BB | C | CC | D
- Glue: MR | WBP
- Core: Birch | Eucalyptus | Poplar | Combi
- Surface: Melamine paper | UV | HPL | PET
- Formaldehyde emission:0.1-0.3mg/hxm²
(normal value):3.5mg/hxm²

Application





Furniture production



Decoration



Decorative plates

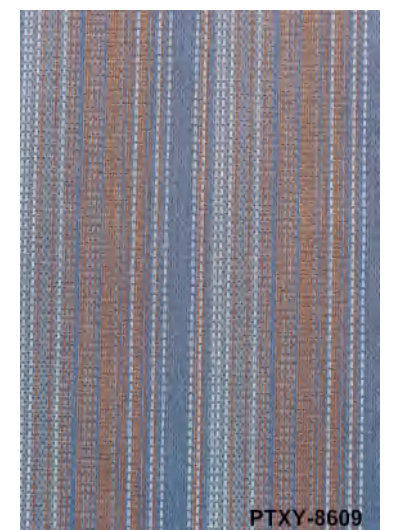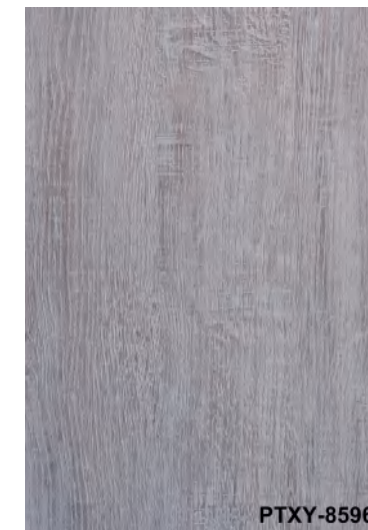

Birch Plywood For Flight Case



Description

Excellent strength and hardness, weather resistance

High surface wear resistance

Smooth, easy to clean surface

Available in a variety of colors and wear - resisting surface

High bearing capacity

Multi- function

Chemical resistance

Specification

Thickness(mm): 2 | 3 | 5 | 6 | 9 | 12 | 15 | 18 | 21 | 24 | 27 | 30 | 35 | 40

Size(mm): 1220x2440 | 1220x2750 | 1250x1250 | 1525x1525 | 1500x3000 Cut to the required

Surface Grade: B | BB | C | CC | D

Glue: MR | WBP

Core: Birch | Eucalyptus


Surface: Black film | Brown film | Hexagon | Anti-slip

Formaldehyde emission:0.1-0.3mg/hxm²
(normal value):3.5mg/hxm²

Application



Packaging



Building



Decorative plates

Certificate

CE CARB FSC IAF ISO EPA

CDX Plywood

Description

- Usually used for exterior walls and sheathing
- 0.8mm thick pine veneer as face and back
- C/D grade, full fresh poplar core or full pine core
- Good melamine WBP glue which can be water test over 12 hours
- All full thickness , no minus thickness tolerance
- Top surface is pine veneer
- Formaldehyde emission level meets the requirements

Certificate

CE CARB FSC IAF ISO EPA



Specification

- Thickness(mm): 4 | 7 | 9 | 12 | 15 | 17 | 18 | 19 | 21 | 25
- Size(mm): 1220x2440 | 1220x2750 | 1250x1250 | 1525x1525 | 1500x3000
Cut to the required
- Surface Grade: C | D
- Glue: MR | WBP
- Core: Poplar | pine
- Surface: Pine
- Formaldehyde emission:0.1-0.3mg/hxm²
(normal value):3.5mg/hxm²


Application



Packaging



Decoration



Building

Marine Plywood

Description

- Corrosion resistance, acid & alkali resistance
- No easy to wear
- With beautiful texture & smooth & bright surface color
- Lightweight
- Moisture-proof & moth-proof
- About 20% lighter than the ordinary plate
- Sanding for 5 times and forming for 4 times

Certificate

CE CARB FSC IAF ISO EPA



Specification

Thickness(mm):	3 5 6 9 12 15 18 21 24 27 30
Size(mm):	1220x2440 1220x2750 1250x1250 1525x1525 1500x3000 Cut to the required
Glue:	MR WBP
Experiment:	72-hour boiling test (WBP)
Surface Grade:	BB CC
Core:	Candlenut Poplar
Surface:	Okoume Eucalyptus Pine Bintangor Keruing Birch Poplar Tropical hardwood melamine paper etc
Formaldehyde emission:	0.1-0.3mg/hxm ² (normal value):3.5mg/hxm ²

Application



Ship decoration



RV decoration

Flame retardant Plywood

Description

Comply with EN13501-1:2007+A1:2009, standard B-S1, d0 fire hazard rating

Comply with R1 and R10EN45545 standards

Flammability group G1 in accordance with Russian standards

This material is suitable for both indoor and outdoor work

Smooth surface

Variety of surface wood veneer can be selected

Versatility - Offers various types of coatings

Certificate

CE CARB FSC IAF ISO EPA



Specification

Thickness(mm): 4 | 6 | 8 | 9 | 10 | 12 | 15 | 16 | 18 | 19 | 20 | 21 | 22 | 24 | 25 | 28 | 30

Size(mm): 1220x2440 | 1220x2750 | 1250x1250 | 1525x1525 | 1500x3000
Cut to the required

Surface Grade: B | BB | C | CC | CP

Glue: MR | WBP

Core: Birch | Eucalyptus | Poplar | Combi


Surface: Okoume | Eucalyptus | Pine | Bintangor | Keruing | Birch | Poplar | Tropical hardwood | HPL | Melamine etc

Formaldehyde emission:0.1-0.3mg/hxm²
(normal value):3.5mg/hxm²


Application



Ship production



Building



RV decoration



Decorative plates

Plywood Grade



1) B grade has few defects, allowing only a few sound joints up to 15mm nodules



2) BB grade allows for the addition of patches to the board surface, and the repair of wood knots and opening defects with veneer inserts



3) CP grade allows a portion of the diameter of no more than 6mm to accumulate nodules, single nodes and loose nodes, 10 per 1m² plate surface



4) CP grade allows for many defects and ensures strong bonding

Plywood Core

Customer Customization board core

Birch



Eucalyptus



Poplar




Poplar and Eucalyptus



Poplar and Eucalyptus
thicken



PRODUCTIVITY & EQUIPMENT DISPLAY

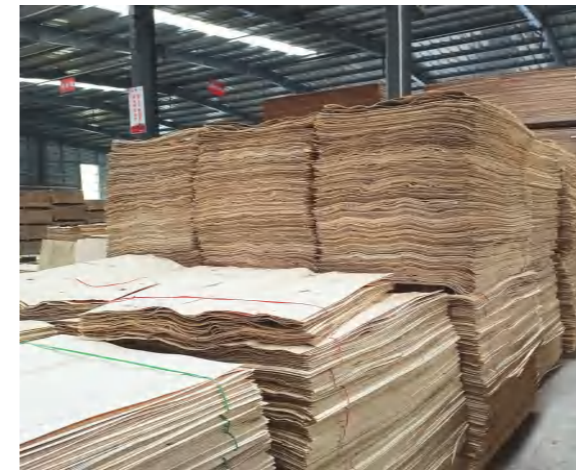

CERTIFICATE

PATENT 1 CE

CE mark is safety qualification mark but not quality qualification mark. Is the "main requirement" that forms the core of the European directive.

PATENT 2 FSC

FSC's mandate is to promote environmentally responsible, socially beneficial and economically viable forest management, and it advocates voluntary, independent, third-party certification as the primary means of achieving these goals.

PATENT 3 IAF

Applicable Country: Argentina, Australia, New Zealand, Austria, Belgium, Brazil, Canada, Chile, China, the Czech republic, Denmark, dubai, Egypt, Finland, France, Germany, Greece, Hong Kong, India, Indonesia, Iran, Ireland, Italy, Japan, Korea, Malaysia, Mauritius, Mexico, South Korea, Luxembourg, the Netherlands, Norway, Pakistan, the Philippines, Poland, Portugal, Romania, Singapore, Slovakia, Slovenia, South Africa, Spain, Sweden, Switzerland, Chinese Taipei, Thailand, Tunisia, United Kingdom, United States of America.

PATENT 4 CARB

CARB is American regulation for the control of formaldehyde emission content in sheet metal. The code is one of the most stringent standards for formaldehyde emissions from composite wood products. CARB regulations of formaldehyde release than the domestic formaldehyde release standard seventy times more strict.



Packing

Standard plywood case,its compressive strength and bearing quality is better.The board area is bit, the soil structure is good,it is better in waterproof. Delivery detail:within 5 - 20 days by your size of goods and request.




Sample

We can send it home by express delivery MOQ : 1



CONTACT US

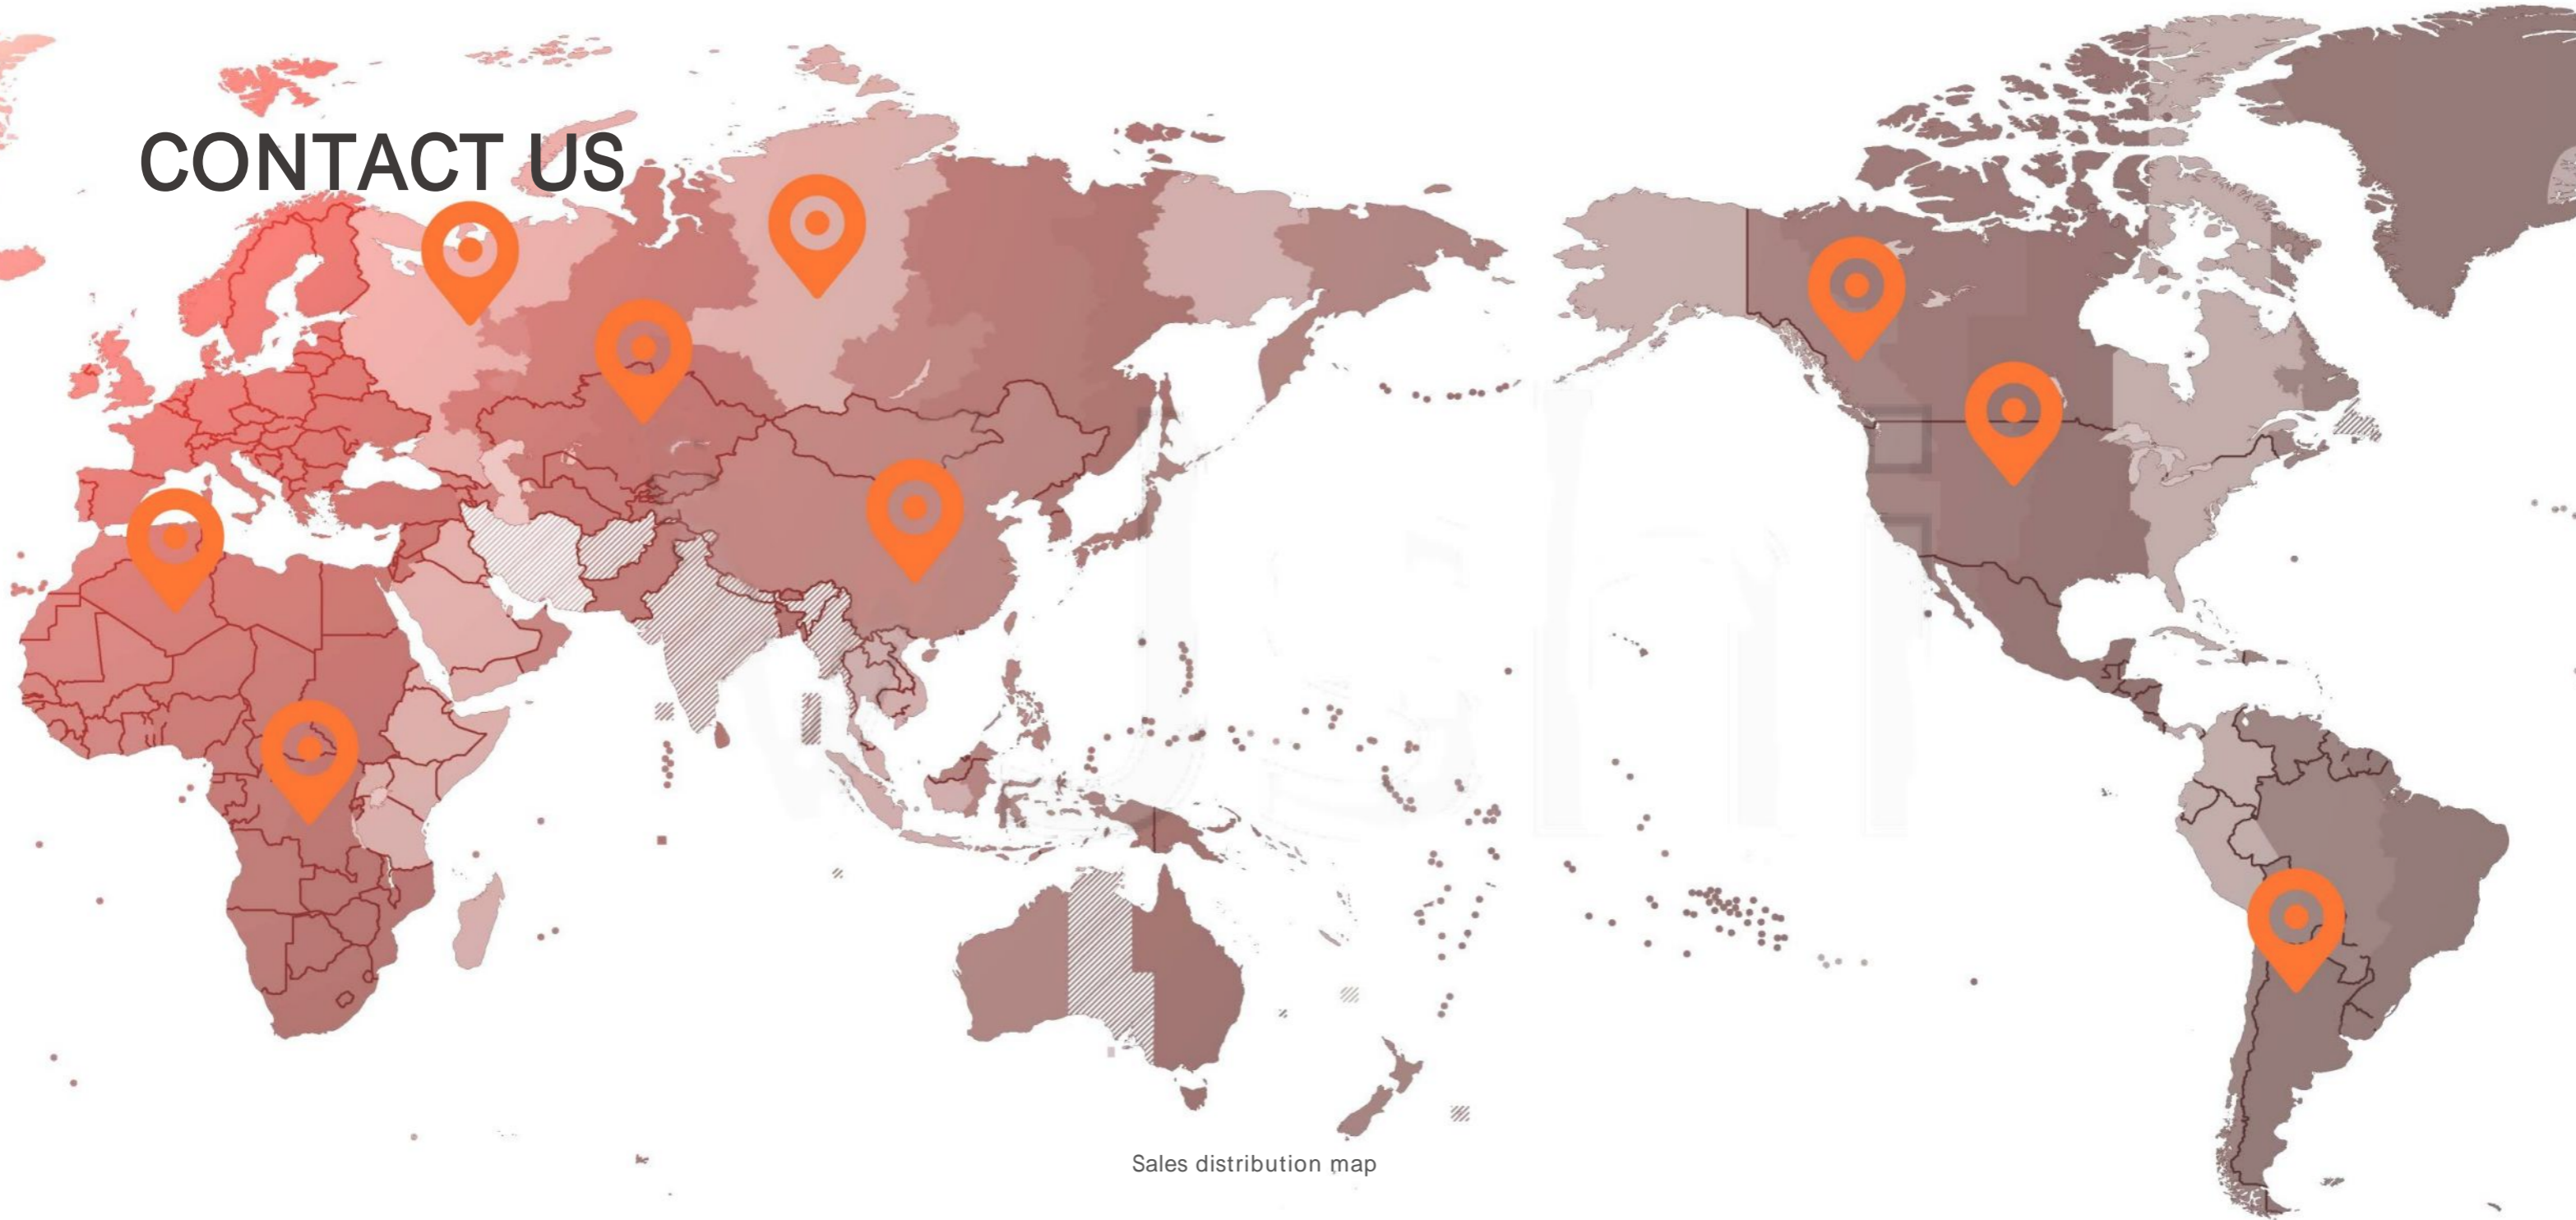

Sales distribution map

Office Address 1:
Nanlin village, Pingyi County, Linyi
City, Shandong Province

Address 2:
No 666 Shisi Pingjing Road,
Fuqiao Town, Taicang City,
Jiangsu, China

Address 3:
3 Road, West District, Gangnan
Industrial Park, Guigang City,
Guangxi Province

Address 4:
Intersection of Gejiu Road and
Shengya Road, Lanshan District
, Linyi City, Shandong Province

Address 5:
No.8 baihua Road, Xiaodian
Town, Suyu District, Suqian city,
Jiangsu Province

Address 6:
62 Xiaoshan Road, Shuyang
County, Jiangsu Province

Foresmate FAQ

Q: When did you run Foresmate factory and company?
A: Factory is started in the year of 1994, company is 2019

Q: What certificate do Foresmate have ?
A: We have ISO 9001, FSC certificate, CE and CARB.

Q: How much capacity can you produce every month?
A: We do 1500 containers per month for plywood.

Q: What is Foresmate advantage?
A: We have good experience in your market, we have already done more than 30 years. Same cost, we do better quality because we have strict production processing control. We have independent inspection department for checking quality.

Q: Do the samples are available?
A: Yes, the sample is free and express charge would be collected in your side or supply us your express account no.

Q: How can Foresmate guarantee quality?
A: Always a pre-production sample before mass production;
Always final inspection before shipment

Q: What can you buy from Foresmate?
A: Birch Plywood / Pine Plywood / Bintangor plywood / Okoume plywood / Poplar plywood / EV plywood etc.

Q: What services can Foresmate provide?
A: Accepted Delivery Terms: FOB, CFR, CIF
Accepted Payment Currency: USD, EUR
Accepted Payment Type: T/T, L/C, Credit card
Language Spoken: English, Chinese
